


► DIMENSIONS

Height cabin ROPS	mm	3087	Total bucket width	mm	2200
Wheel base	mm	2700	Track width	mm	1760
Ground clearance	mm	400	External turning radius	mm	5050
Loading ramp angle		33°	Rear axle oscillation		10°+10°

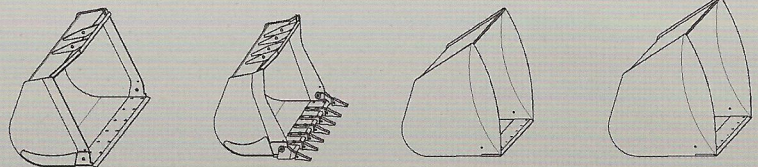

► PERFORMANCE DATA

		STANDARD	ROCK	OVERSIZE	EXTRA OVERSIZE
Full load bucket capacity	m ³	1,7	1,5	2,2	2,5
Bucket width	mm	2350	2350	2500	2500
Bucket weight	kg	650	600	750	850
Max operative height	mm	4600	4550	4675	4750
Bucket pin height	mm	3600	3600	3600	3600
Dump clearance	mm	44°	44°	44°	44°
Dump height	mm	2800	2833	2733	2700
Dump distance	mm	800	763	874	912
Max dump distance	mm	1750	1713	1824	1862
Straight tipping load	kg	6200	6500	6000	5800
Full turned tipping load	kg	5500	5700	5300	5100
Breakout force	kg	8400	8925	7600	7255
Total length	mm	6400	6350	6475	6550
External bucket turning radius	mm	5575	5558	5700	5743
Total weight	kg	9000	8950	9100	9200

► LOADING FORK (Kg) - CENTRE OF GRAVITY 500 mm

Static tipping load, full turn	4600	Payload EN 474-3 (60%)	2600
Payload EN 474-3 (80%)	3700	Payload DIN 24094 (50%)	2300